

ComBi-line machines can quickly brew large quantities of fresh filter coffee. A ComBi-line set-up consists of a brewing unit with either one or two containers (40 litre).

The user-friendly ComBi-line can be placed on a buffet or counter, or used in combination with a serving trolley.

BENEFITS



CAPACITIVE TOUCH USER INTERFACE

- + Coffee dosing advice
- + Easy operator and service menu
- + Programmable timers
- + Day and total counters



CNE CONTAINERS

- + LED lighting in container
- + No-drip tap
- + Transportable and stackable
- + Improved container heating



- + Tap for different labels; coffee, tea or hot water



- + On-screen brewing process
- + Easy on-screen instructions
- + Display your private label



- + Raised base plate. Easy when using large thermos jugs.



CB 1X40 L



CB 1X40 R

OPTIONS



- + Container use with tap
- + S-swivelarm
- + Tap protection



- + For making tea in a container, place the special tea filter with filler pipe.









MODEL	40 L
Article number 2 x 40	1007173
Article number 1 x 40 L	1007175
Article number 1 x 40 R	1007174

CAPACITY COFFEE SYSTEM	
Brew time (water dosing time)	approx. 14 min./40 Ltr.
Hour capacity (water volume)	180 Ltr.
Buffer stock 2 x 40	80 Ltr.
Buffer stock 1 x 40 L/R	40 Ltr.
Filter paper	Ø280/635

ELECTRICAL SYSTEM	
Electrical connection 2 x 40	3N~380-415V/ 50-60C _y /18375W
Electrical connection 1 x 40 L/R	3N~380-415V/ 50-60C _y /18225W

CONTAINER	CN40e
Contents	40 l
Electrical connection	1N~ 220-240V/ 50-60C _y /150W

DIMENSIONS	CB 1x40 L	CB 1x40 R	CB 2x40
A =	765	765	1235
B =	805	805	1320
C =	465	465	465
D =	685	685	685
E =	975	975	975
F =	845	845	840
G =	835	835	833
H =	180	180	155
I =	115	115	590
J =	150	150	625
K =	195	195	670
L =	32	32	32
M =	27	27	27
N =	32	32	32

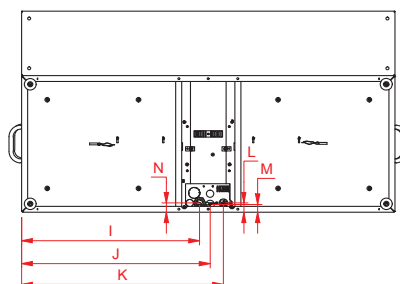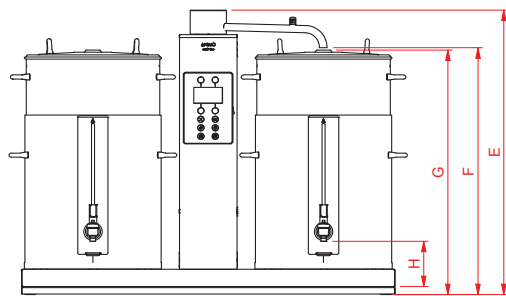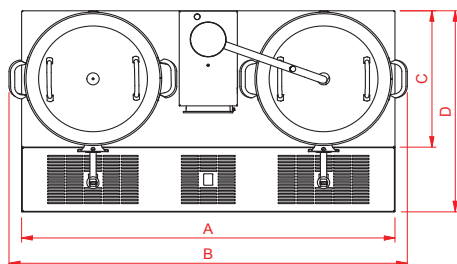

SAFETY FIRST

+ CB gecertificeerd (TÜV)